



## EyeCom DOME CAMERAS



### BLACK & WHITE DOME CAMERAS


#### CB-8005W

With high sensitivity & low minimum illumination level, these are ideal for indoor, even under low light environment, with quality video images.

#### SPECIFICATION

Model Number	CB-8005W
Image Pick-up Device	SONY 1/3" HAD CCD sensor
Effective Picture Element	EIA: 510(H)x492(V), CCIR: 500(H)x582(V)
Horizontal Resolution	420 TV lines
Minimum Illumination	0.1 LUX @ F2.0
S/N Ratio	More than 48dB
Auto Electronic Shutter	EIA: 1/60s~1/100,000s, CCIR: 1/50s~1/110,000s
Scanning System	Interlace 2:1
Gamma Characteristic	0.45
Lens Furnished	3.6mm/F2.0 Board Lens (Optional: 2.5/4.3/6.0/8.0/12/16mm)
Auto Gain Control	Yes
Synchronous System	Internal, Negative Sync.
Video Output	1 Vp-p / 75 Ohms, BNC connector
Power Supply	12V DC
Operating Temperature	-10 °C ~ 50 °C (14 °F ~ 122 °F)

\*Specifications subject to change without notice

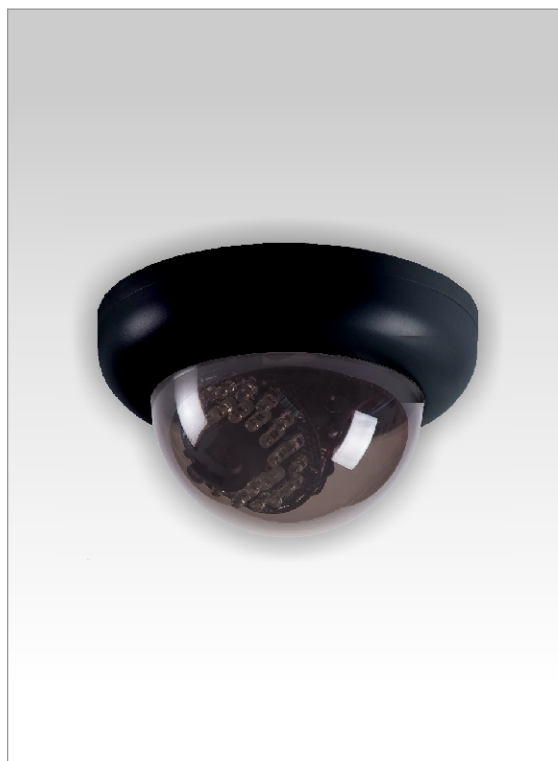

### COLOR "NIGHT VISION" IR DOME CAMERA

#### CC-9006IR

High sensitivity and minimum illumination.

Night Vision: 25 IR Led's - Up to 50 ft. at darkness

Low power consumption

Built-in reverse polarity protection

#### SPECIFICATION

Model Number	CC-9006IR
Image Pick-up Device	SONY 1/3" super HAD CCD sensor
Effective Picture Element	NTSC: 510(H)x492(V) PAL: 500(H)x582(V)
Horizontal Resolution	380 TV lines
Minimum Illumination	0.2 LUX @ F2.0
S/N Ratio	More than 48dB
Auto Electronic Shutter	NTSC: 1/60s~1/100,000s, PAL: 1/50s~1/110,000s
Gamma Characteristic	0.45
Lens Furnished	3.6mm/F2.0 Board Lens
Auto Gain Control	Yes
Auto White Balance	Yes (2500K~9500K)
Synchronous System	Internal, Negative Sync.
Video Output	1 Vp-p / 75 Ohms, BNC connector
Power Supply	12V DC
Operating Temperature	-10 °C ~ 50 °C (14 °F ~ 122 °F)

\*Specifications subject to change without notice