



CC-9006W
CC-9006WH

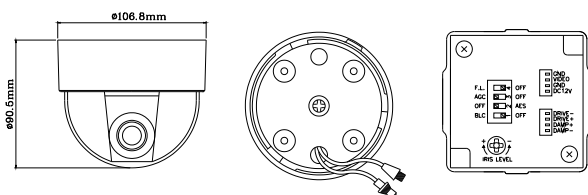

CC-9406M

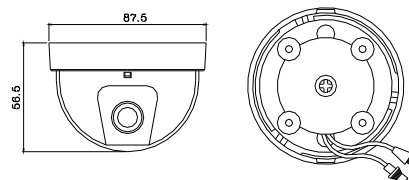

FEATURES

- CC-9006W: SONY 1/3 Super HAD CCD sensor
- CC-9006WH: SONY 1/3 Hi-Res. Super HAD CCD sensor
- 380 (CC-9006W) 470 (CC-9006WH) TV lines of horizontal resolution
- AES, AGC, AWB
- Furnished with board lens

SPECIFICATION

Mode No.	CC-9006W	CC-9006WH
Image Pick-up Device	SONY 1/3 CCD	SONY 1/3 HR CCD
Effective Picture Element	NTSC: 510x492, PAL: 500x582 (HxV)	NTSC: 768x494, PAL: 752x582 (HxV)
Horizontal Resolution	380 TV lines	470 TV lines
Minimum Illumination	0.2 LUX @ F2.0	0.4 LUX @ F2.0
S/N Ratio	More than 48dB	
Auto Electronic Shutter	NTSC: 1/60s~1/100,000s, PAL: 1/50s~1/110,000s	
Gamma Characteristic	0.45	
Lens Furnished	Board Lens 3.6 mm / F2.0 (optional: 2.5/4.3/6.0/8.0/12/16 mm)	
Auto Gain Control	Yes	
Auto White Balance	Yes (2500K~9500K)	
Synchronous System	Internal, Negative Sync.	
Video Output	1 Vp-p / 75 Ohms, BNC or F connector	
Power Supply	12V DC	
Operating Temperature	-10 °C ~ 50 °C (14 °F ~ 122 °F)	

* Specifications subject to change without notice

FEATURES

- SONY 1/4 Super HAD CCD sensor
- 330 TV lines of horizontal resolution
- Minimum illumination of 0.5 Lux
- AES, AGC, AWB
- Furnished with board lens

SPECIFICATION

Mode No.	CC-9406M
Image Pick-up Device	SONY 1/4 Super HAD CCD sensor
Effective Picture Element	NTSC: 510x492, PAL: 500x582 (HxV)
Horizontal Resolution	330 TV lines
Minimum Illumination	0.5 LUX @ F2.0
S/N Ratio	More than 48dB
Auto Electronic Shutter	NTSC: 1/60s~1/100,000s, PAL: 1/50s~1/110,000s
Gamma Characteristic	0.45
Lens Furnished	3.6 mm / F2.0 (optional: 2.5/4.3/6.0/8.0/12/16 mm)
Auto Gain Control	Yes
Auto White Balance	Yes (2500K~9500K)
Synchronous System	Internal, Negative Sync.
Video Output	1 Vp-p / 75 Ohms, BNC or F connector
Audio Output (Optional)	2 Vp-p / 50 Ohms, RCA output connector
Power Supply	12V DC
Power Consumption	120mA
Operating Temperature	-10 °C ~ 50 °C (14 °F ~ 122 °F)

* Specifications subject to change without notice