



**CC-9006 WL 1**  
(3.5~8.0mm)

**CC-9006 WL 2**  
(9.0~22.0mm)

This compact dome-shaped design blends in naturally with the interior. Ideal for restaurant, boutiques, galleries, hotel and so on.


Presented by both color and B/W SONY 1/3 Super HAD CCD sensor-with auto iris and manual vari-focal, 3.5 mm to 8.0 mm or 9.0 mm to 22.0mm lens.

Focus Distance (f)	3.5 mm	6 mm	8 mm	10 mm	15 mm	22 mm
Distance between lens and subject	5 m					

## FEATURES

- Color Camera with SONY 1/3 Super HAD CCD Sensor in Medium Dome.
- High sensitivity, low smear, high anti-blooming
- Auto Electronic Shutter(AES), Auto Gain Control (AGC), Auto Iris(AI), Back Light Compensation(BLC) Auto White Balance(AWB), Flicker Less mode(FL).
- Built-in Vari-focal type DC-drive auto iris lens
- Furnished with DC power cable and video cable.

## DIMENSIONS

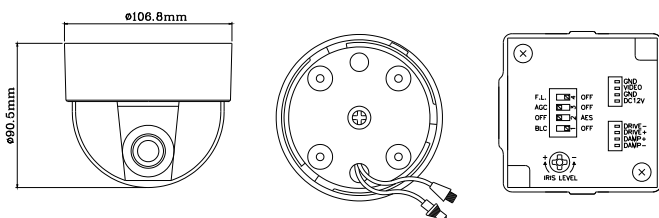

## SPECIFICATION

Mode No.	CC-9006 WL 1	CC-9006 WL 2
Image Pick-up Device	Color SONY 1/3 Super HAD CCD sensor	
Effective Picture Element	NTSC: 510X492, PAL: 500X582 (HXV)	
Horizontal Resolution	380 TV lines	
Minimum Illumination	0.2 LUX @ F2.0	
S/N Ratio	More than 46dB	
Auto Electronic Shutter	NTSC: 1/60s~1/100,000s, PAL: 1/50s~1/110,000s ON/OFF	
Auto Iris Control	DC Drive Iris Control.	
Flickerless Mode	NTSC: 1/100s, PAL: 1/120s ON/OFF switchable	
Gamma Characteristic	0.45	
Lens Furnished	Vari-Focal with DC Drive Iris Lens	
Focal Length & Aperture Ratio	3.5~8.0mm/F1.6~360	9.0~22.0mm/F1.6
Angle Field of View	Wide: 78.9X58.3mm, Tele:35.4X26.5mm	
Auto Gain Control	High / Low switchable	
Auto White Balance	Yes. (2500K~9500K)	
Back Light Compensation	ON/OFF switchable	
Synchronous System	Internal, Negative sync.	
Video Output	1.0 Vp-p / 75 Ohms	
Video Output (Optional)	2.0 Vp-p / 50 Ohms	
Power Supply	12V DC (Dual Voltage)	
Operating Temperature	-10°C ~ 50°C (14°F ~ 122°F)	

\* Specifications subject to change without notice